




BRUNONE
INNOVATION

SPARCRIC G

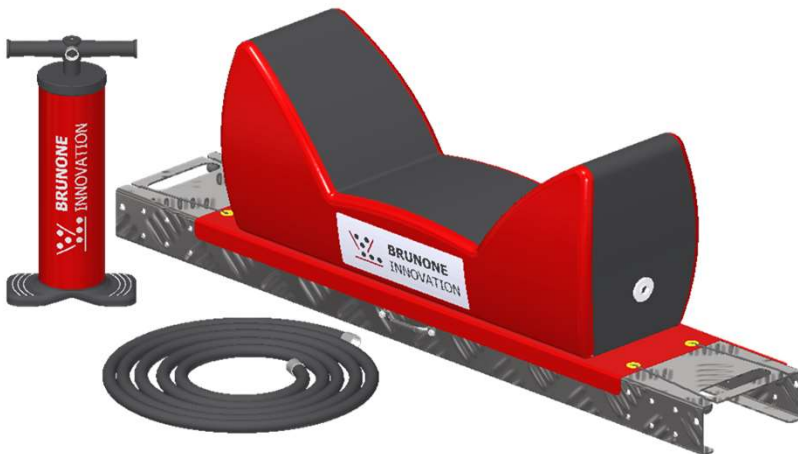

PRODUCT FEATURES

- In stock for belt widths **500 to 2000 mm**, wider belts on request.
- The required **SPARCRIC G** inflate pressure is around **0,03 bars**.
- The **SPARCRIC G** weight starts from **4kg (BW500-800) to 20kg (BW1800-2000)**.

MAINTENANCE TOOL FOR REPLACING IDLERS

- The **SPARCRIC G** is an **innovative belt-lifting system**, designed to make idlers maintenance on belt conveyors easier.
- **SPARCRIC G** inflates using a simple **low-pressure pneumatic pump**.
- The **SPARCRIC G** is optimal for classic **3-idler supports**. Available on request for other kinds of supports.

Maintenance operations are quick, efficient and easy to carry out.

The **SPARCRIC G** allows safe and simple idler replacement operations with a single operator.

The **SPARCRIC G** is light and easily transportable, improving working conditions.



Option available



Portable electric inflator



R. BRUNONE

CONFINEMENT • OPTIMISATION • SÉCURITÉ DES CONVOYEURS


1, rue de la Cressonnière
27950 Saint-Marcel, France
Tél.: +33 (0)2 32 64 20 20
Fax: +33 (0)2 32 64 20 11
E-mail: brunone@brunone.fr



BRUNONE
INNOVATION


SPARCRIC G

Inflatable Part Dimensions

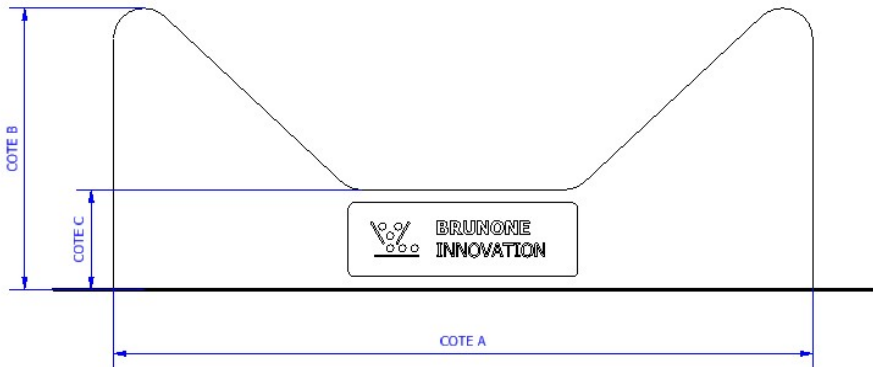

LARGEUR BANDE	COTE A	COTE B	COTE C	COTE D	One-way valve	Safety valve 5PSI	Max Pression	Equipment Weight
500-800	765	355	160	200	1	1	0.34 Bar/ 5 psi	5 Kg
1000-1200	1141	455	160	250	1	1	0.34 Bar/ 5 psi	10 Kg
1400-1600	1660	654	225	300	2	1	0.34 Bar/ 5 psi	15 Kg
1800-2000	2000	769	250	350	2	1	0.34 Bar/ 5 psi	20 Kg

Crossbar Dimensions

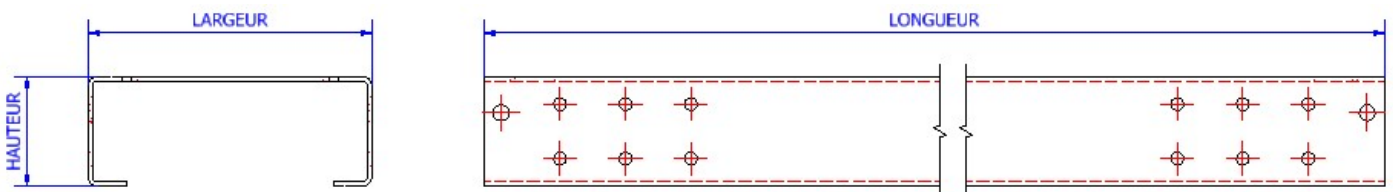

LARGEUR BANDE	LENGTH	HEIGHT	WIDTH
500-800	1100	50	200
1000-1200	1500	100	260
1400-1600	2000	150	304
1800-2000	2400	150	360



R. BRUNONE

CONFINEMENT • OPTIMISATION • SÉCURITÉ DES CONVOYEURS

1, rue de la Cressonnière
27950 Saint-Marcel, France
Tél.: +33 (0)2 32 64 20 20
Fax: +33 (0)2 32 64 20 11
E-mail: brunone@brunone.fr