

# SPARMAT

## FEATURES

❖ **SPARMAT** offers three degrees of freedom:

- **the flexibility of the belt** (due to its position relative to the damping pads),
- **the chains' vertical movement** when material falls on the pads,
- **the flexibility of the lateral rubber absorbers** placed under the chains.

❖ **SPARMAT** is available in standard lengths of **1200, 1500 and 1800 mm**, and in three different versions for varying lump sizes (**up to 500 mm**).

For larger lump sizes, consult with us




## DYNAMIC IMPACT CRADLE

The SPARMAT consists of HDPE pads linked together with chains, forming an innovative alternative to traditional impact cradles. It effectively absorbs heavy-duty shocks caused by material landing on the belt at loading points.

The SPARMAT eliminates nip points at loading zones.

Thanks to The SPARMAT's chain system, adjustments can be made easily, quickly and precisely.

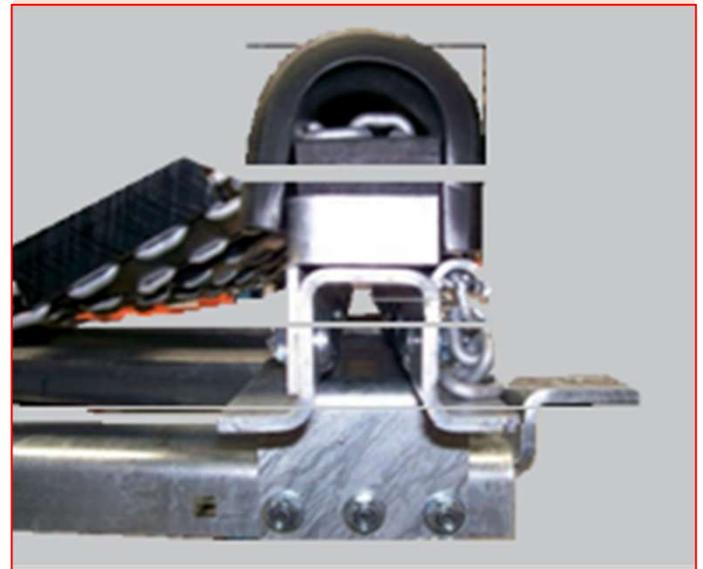

**R. BRUNONE**

CONTAINMENT • OPTIMISATION • SAFETY OF CONVEYORS

Tél.: +33 (0)2 32 64 20 20  
 Fax: +33 (0)2 32 64 20 11  
 E-mail: brunone@brunone.fr  
 Site : www.brunone.fr