




SPARCRIC G

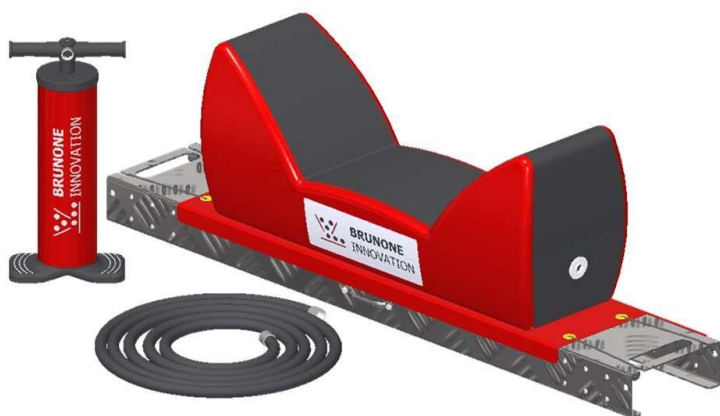

PRODUCT FEATURES

- In stock for belt widths **500 to 2000mm**, wider belts on request.
- The **SPARCRIC G** weight starts from **4kg (BW500-800)** to **20kg (BW1800-2000)**.
- Lifts up to **540kg**.

MAINTENANCE TOOL FOR REPLACING IDLERS

- The **SPARCRIC G** is an **innovative belt-lifting system**, designed to make idlers maintenance on belt conveyors easier.
- The **SPARCRIC G** inflates using a **simple low-pressure pneumatic pump**.
- The **SPARCRIC G** is optimal for classic **3-idler supports**. Available on request for other kinds of supports.

Maintenance operations are **quick, efficient and easy** to carry out.

The **SPARCRIC G** allows **safe and simple** idler replacement operations with a single operator.

The **SPARCRIC G** is **light** and easily transportable, improving working conditions.

Option available



Portable electric pump on battery



R. BRUNONE


CONTAINMENT • OPTIMISATION • SAFETY OF CONVEYORS

rue de la Cressonnière
1950 Saint-Marcel, France
t.: +33 (0)2 32 64 20 20
mail: commercial@brunone-innovation.fr




SPARCRIC G

INFLATABLE PART DIMENSIONS

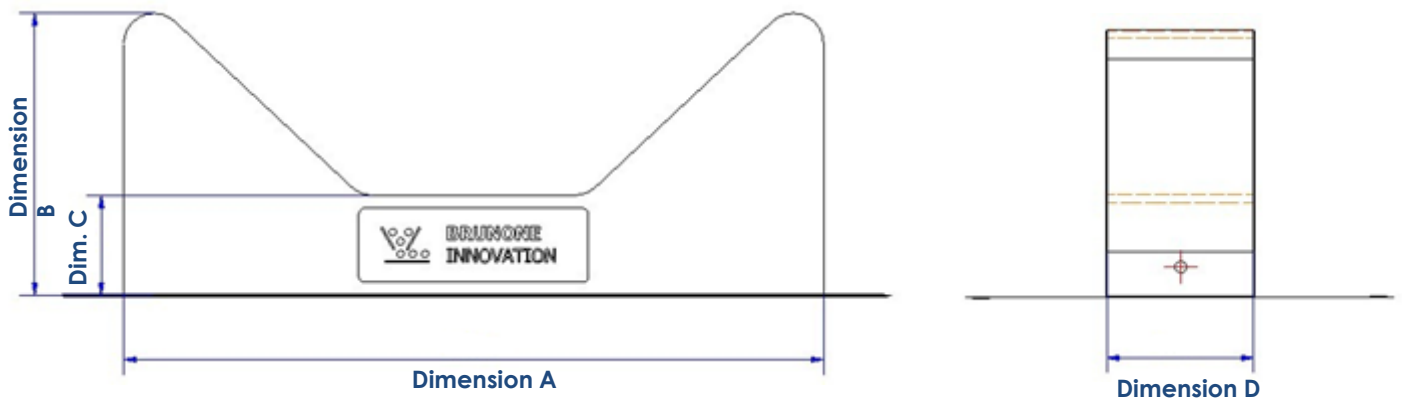

BELT WIDTH	Dim. A	Dim. B	Dim. C	Dim. D	One-way valve	Safety valve 5PSI	Max. pressure	Equipment's weight
500-800	765	355	160	200	1	1	0.34 Bar/5 Psi	5 Kg
1000-1200	1141	455	160	250	1	1	0.34 Bar/5 Psi	10 Kg
1400-1600	1660	654	225	300	1	1	0.34 Bar/5 Psi	15 Kg
1800-2000	2000	769	250	350	1	1	0.34 Bar/5 Psi	20 Kg

CROSSBAR DIMENSIONS

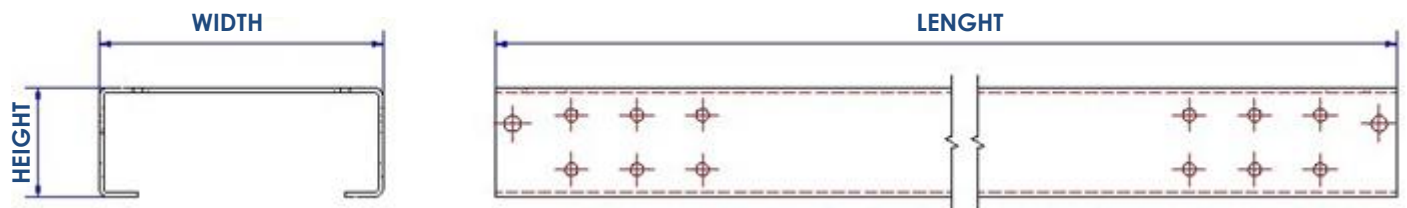

BELT WIDTH	LENGHT	HEIGHT	WIDTH	MAX. LOAD
500-800	1100	50	200	200 Kg
1000-1200	1500	100	260	370 Kg
1400-1600	2000	150	304	580 Kg
1800-2000	2400	150	360	540 kg



R. BRUNONE

CONTAINMENT • OPTIMISATION • SAFETY OF CONVEYORS

rue de la Cressonnière
 950 Saint-Marcel, France
 t.: +33 (0)2 32 64 20 20
 mail: commercial@brunone-innovation.fr